



Remote Indicator

C-9314P

Description

The C-9314P Remote Indicator is used to display the alarms of the detector. Suitable application if the detector installed inside the room, false ceiling and underground cable. When the unit alarm, the LED on the lamp will light so that the personnel can identify that the detector was triggered alarm without entering to room.

Features and Benefits


- Highlight LED
- Wall mounting. Easy installation and connection.

Technical Specifications

- Operating voltage: 2.5 to 3Vdc
- Operating Current: 15mA
- Operating temperature: -10°C to +50°C
- Relative humidity: 95%
- Indicator: LED, red
- Application: Indoor use
- Material and colour: ABS, white, red
- Wiring: 1 pair polarized
- Dimensions: 65mm x 65mm x 35mm

Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. From Terminals 2 and 4 of detector base. Connect terminal 2 to (+) positive unit as well as terminal 4 to (-) negative terminal. The cable must be fire rated type and the distance between the detector and remote indicator must not exceed 50 meters.

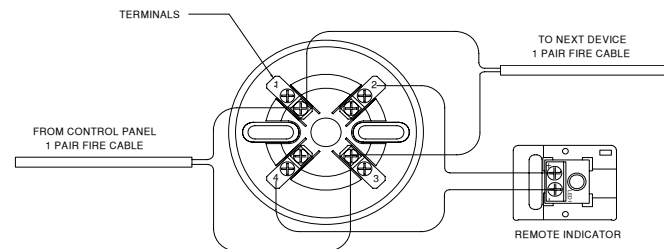

Selection of compatible Detector

- ✓ D/I-9102 Optical Detector with Remote Indicator Output
- ✓ D/I-9103 Dual Heat Detector with Remote Indicator Output
- ✓ D/C-9102 Conventional Optical Smoke Detector with Remote Indicator Output
- ✓ DC-9103 Conventional Dual Heat Detector with Remote Indicator Output

Ordering Information



Part Number: C-9314P
Description: Remote Indicator
Weight / Kg.: 0.03
Pack Qty. per Box: 100