



Addressable Sounder and Strobe

I-9403



548e(c1-5)



0832-CPD-0448

Description

The I-9403 is a detachable, surface mounted sounder and strobe. The audio efficiency and sound distribution generate over 85 dB at 3 meter distance giving an excellent audibility from the device location. Using six highlights LED's for high intensity visual alarm to warn the people.

The GST sounder series are convenient plug and turn installing method, two part construction with base mounted termination allows easy installation and avoiding the wiring and connection problem associated with traditional sounder.

Features and Benefits

1. Two tones high sound level
2. Low power consumption
3. High intensity LED cluster
4. Remote start input can be used to drive with other systems
5. Programmable alarm mode, evacuate or alert/evacuate mode
6. Electronically addressable
7. Easy installation and connection.

Technical Specifications

- Standard: EN54-3
- Approval: LPCB,CPD, CE
- Sound Level Output
 - Tone 1:** Sound Level: 75dB~85dB (at 3m ahead horizontally (A weighted))
 - Flashing Frequency:0.7×(1±20%)Hz
 - Sound Pattern: 2.8KHz (430ms on /1200ms off)
 - Tone 2:** 85dB~115dB (at 3m ahead horizontally (A weighted))
 - Flashing Frequency:1.4×(1±20%)Hz
 - Sound Pattern: 2.8KHz (430ms on /340ms off)
 - (Refer to sound level data below)
- Operating Current:
 - Loop: Standby-1mA; Alarm-5mA
 - PSU: Standby-3mA; Alarm-50mA
- Operating Voltage: Loop: 24V ; PSU: 24VDC
- Addressing: 1 or 2 using P-9910B
- Operating temp: -10°C to +50°C
- Relative humidity: 95%
- Application: Indoor use
- Protection rating: IP 33
- Material and colour: ABS, red (PANTONE 1795C)
- Wiring: 2 pairs ; 1 pair 24vdc supply and 1 pair for loop
- Weight:355g (deep base); 327g
- Dimensions: ϕ 110mm×97.5mm (Deep Base)
 ϕ 110mm×83mm (standard supplied)

Tone I (alarm), Maximum Volume


Angle	Horizontal		Vertical	
	20V	28V	20V	28V
15°	75.19	77.17	72.85	72.31
45°	84.01	87.07	82.57	85.63
75°	87.61	90.85	86.98	89.32
105°	87.43	90.22	88.42	90.67
135°	83.11	86.17	83.65	86.80
165°	70.60	73.84	75.55	77.98

Tone II (pre-alarm), Maximum Volume

Angle	Horizontal		Vertical	
	20V	28V	20V	28V
15°	72.67	75.73	61.15	65.11
45°	80.50	83.20	78.61	81.40
75°	84.37	87.25	83.56	86.53
105°	83.65	86.53	84.91	88.15
135°	79.51	82.57	80.32	83.65
165°	66.10	69.61	70.78	74.11


Sounder Installation

The sounder should be installed in compliance with all local codes or BS5389 and EN54. It is installed onto a standard one gang electrical box with a mounting hole that has 5.5cm to 8 cm spacing.

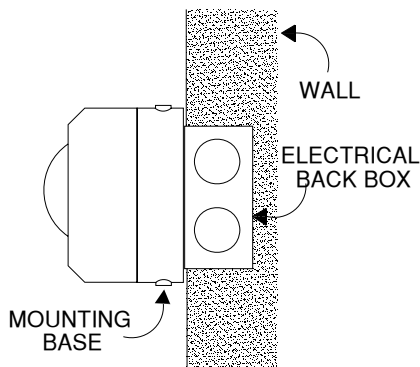

Programming

The address and mode of sound level of the sounder can be programmed using GST handheld programmer (P-9910), purchased separately. Connect the two wires of the handheld programmer to Z1 (2), Z2 (4) terminals of the sounder.fig1

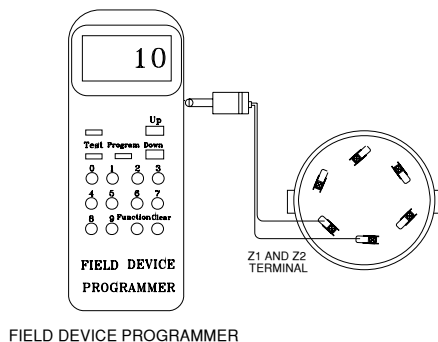


Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. The Z1, Z2 connect to addressable fire detection loop, non-polarized, the D1, D2 is for 24VDC power supply, non-polarized. The S and G is dry contact input. The cable must be fire rated type and the size depends on the wiring distance and application. Minimum size gauge 1.0mm²(18 AWG)

Power Supply

24Vdc

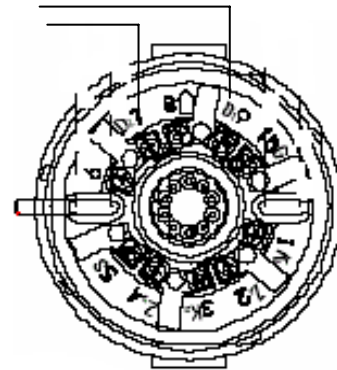

Selection of compatible Control Panels

Compatible with all GST Intelligent Fire Alarm Panels GST 100, GST 200/2 and GST IFP8

Ordering Information



Part Number: I-9403
Description: Addressable Sounder Strobe
Weight / Kg.: 0.360
Pack Qty. per Box: 20

Accessories



Part Number: C-94DB
Description: Deep Base
Weight / Kg.: 0.070
Pack Qty. per Box: 100

MANUFACTURED IN ACCORDANCE WITH

